




# Air Process Heaters

**3/8" Diameter – Horizontal use only**

## Construction

- 1 Optional stainless steel bushing — 1/4" NPT male fitting.
- 2 Fiberglass insulated leads.
- 3 Epoxy seal.
- 4 Copper tee.
- 5 Optional brass bushing — 1/4" NPT male fitting.

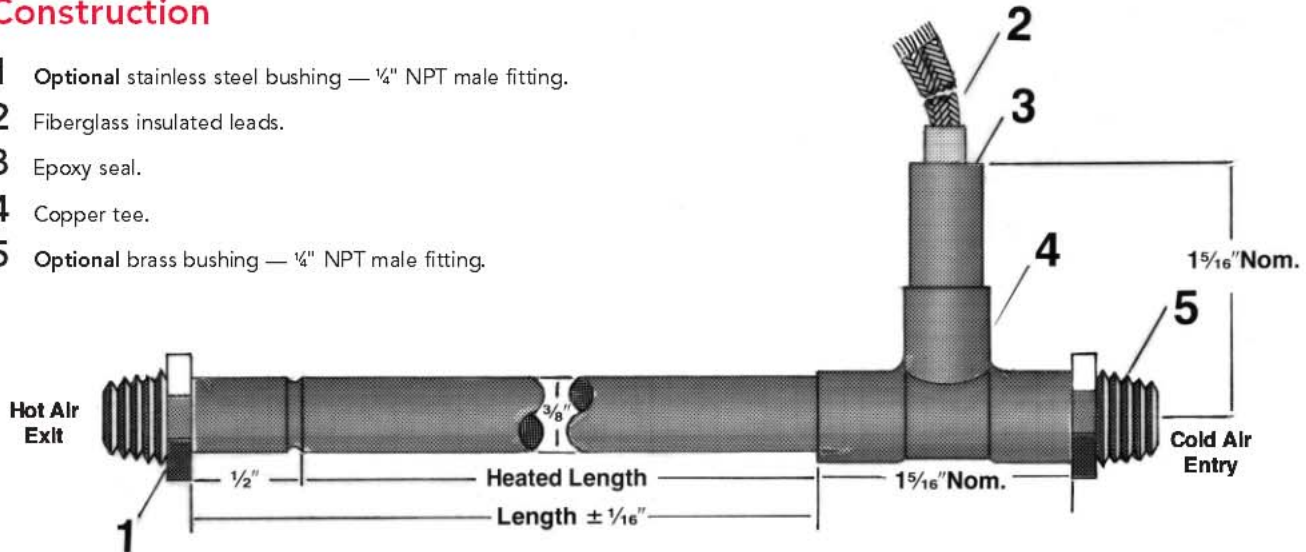

▼ Manufactured Items ▼

## Specifications

Maximum Amperage: 6

Cross Sectional Flow Area: .03 sq. in.

Maximum CFM: 8

CFM	Max. Watts/linear in of heated length
1	60
2	60
4	100
6	150
8	200

Pressure rating: 80 psig.

## Sizes


Diameter: 3/8"


Length	Heated Length	Cat. No. w/o fittings	Cat. No. w/Male NPT fittings
2"	1 1/2"	AH37-2	AH37-2MF
3"	2 1/2"	AH37-3	AH37-3MF
4"	3 1/2"	AH37-4	AH37-4MF
5"	4 1/2"	AH37-5	AH37-5MF
6"	5 1/2"	AH37-6	AH37-6MF
7"	6 1/2"	AH37-7	AH37-7MF
8"	7 1/2"	AH37-8	AH37-8MF
9"	8 1/2"	AH37-9	AH37-9MF
10"	9 1/2"	AH37-10	AH37-10MF

## Special Features Available

**MF:** 1/4" NPT male fittings (add MF to catalog number).

**HF:** Hose adapter on entry and only (add HF to catalog number and specify I.D. of hose).

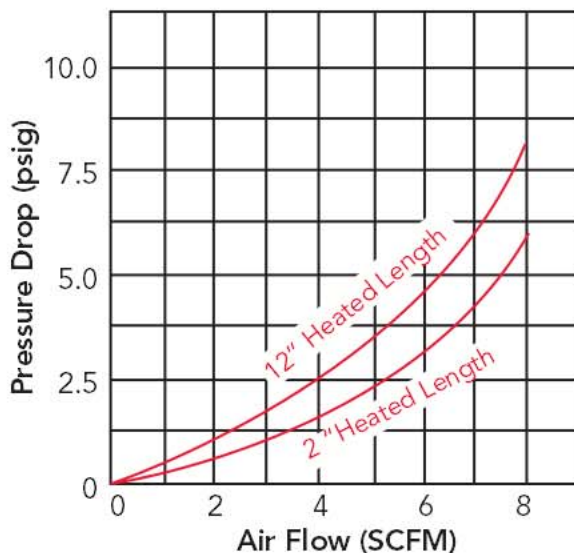




# Air Process Heaters

▼ IN STOCK ITEMS ▼

## Standard Air Heaters

Supplied with: Type SF2 leads

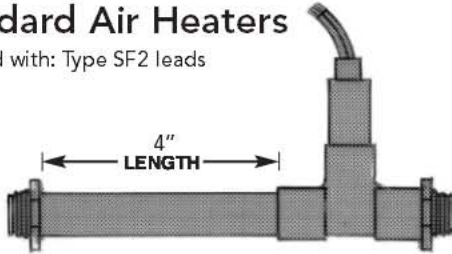

Length	Cat. No.	Dia.	Wattage	Voltage	Watts/		Weight	Lead Length	Fittings
					Linear	Inch			
4"	AH37-4	3/8"	50	120	14		.12	12"	
4"	AH37-4MF	3/8"	50	120	14		.18	12"	1/4" NPT
4"	AH37-4	3/8"	200	120	57		.12	12"	
4"	AH37-4MF	3/8"	200	120	57		.18	12"	1/4" NPT
4"	AH37-4	3/8"	200	240	57		.12	12"	
4"	AH37-4MF	3/8"	200	240	57		.18	12"	1/4" NPT

AIR